## CHEETAH

**RUGGEDIZED CAMERA SERIES** 

# **C4191**CMOS 16 MP Quad CXP-6



#### Imperx: C4191

The C4191 features the ON Semiconductor Python NOIP1xx016KA CMOS image sensor with a native resolution of 4096 x 4096 in an APS-H optical format. The GenlCam<sup>™</sup> compliant camera delivers up to 120 frames per second in global shutter mode using a 4-channel CXP-6 CoaXPress<sup>®</sup> interface. CMOS technology eliminates smear columns from areas of ultra-bright intensity and specular reflections in uncontrolled lighting applications. The Imperx Cheetah line provides excellent image quality with Imperx proprietary processing. In addition, Imperx puts you in control and gives you full access to raw data without corrections. Using the simple, intuitive Gen<I>Cam<sup>™</sup> compliant graphical user interface, you can quickly apply image corrections, if desired. The C4191's flexibility, image quality, and speed make it suitable for a broad range of diverse and demanding applications, but "one size doesn't fit all," and Imperx can help optimize the camera to your exact requirements.

#### Specifications

**External Inputs/Outputs** 

Feature	Description	Feature
Output Interface	4-channel CXP-6 CoaXPress® w/PoCXP	Strobe Output
Resolution	4096 (H) x 4096 (V)	Pulse Generator
Sensor	Python NOIP1xx025KA, CMOS Color/Mono/ ENIR	Data Correction
Sensor Format	18.4 mm (H) x 18.4 mm (V), 26 mm diagonal	
Pixel Size	4.5 microns square	Lens Mount
NIR Sensitivity	Mono: 850nm: 18%, 950nm: 6% ENIR: 850nm: 30%, 950nm: 11%	Power over CoaXPre
Shutter	Global shutter (GS)	(PoCXP)
Fixed Pattern Noise	<0.9 LSB	Power consumption
Sensor Digitization	10-bit	Size - Width/Height/L
Frame Rate	120 fps (8-bit), 107 fps (10-bit)	Weight
Dynamic Range	59 dB	Vibration, Shock
Row Overhead Time (ROT)	Zero	Environmental
Output Bit Depth	8, 10-bit	Humidity
Analog Gain Control	1x, 1.26x, 1.87x, 3.17x	MTBF
Digital Gain	1x (0dB) to 15.9 (24 dB) with a precision of 0.001x. (AGC available)	Military Standard
AEC/AGC	Yes	Regulatory
White Balance	Manual, Auto, Off	
Shutter Speed	1 μs/step, 40 μs to 1.0 s	
Exposure Control	Off, Internal, External. (AEC available)	
Regions of Interest (ROI)	1 ROI	
Averaging Decimation	1 x 2, 2 x 1, 2 x 2	
Sub-sampling	1 x 2, 2 x 1, 2 x 2	
Trigger Inputs	External, Pulse Generator, Software	
Trigger Options	Edge, Debounce	
Trigger Modes	Trigger over CoaXpress, Internal, External, Software	

2 IN (OPTO, LVTTL) / 2 OUT (OPTO, TTL)

Feature	Description
Strobe Output	2 strobes, programmable position and duration
Pulse Generator	Yes, programmable
Data Correction	2 LUTs pre-programmed with Gamma 0.45 Bad pixel correction (static), Flat field correction, Fixed pattern noise
Lens Mount	F-Mount (Default), M42, EF Canon (passive or active)
Power over CoaXPress (PoCXP)	Yes
Power consumption	Typical: 10 W, Maximum: 10.5 W
Size - Width/Height/Length	72.0 mm (W) x 72.0 mm (H) x 44.3 mm (L)
Weight	379 g
Vibration, Shock	TBD
Environmental	-40 °C to +70 °C Operating, -50 °C to +90 °C Storage
Humidity	10% to 90% non-condensing
MTBF	>323,000 hours @ 40 °C (Telcordia SR-332)
Military Standard	MIL-STD-810G
Regulatory	FCC Part 15 Class A, CE, RoHs




#### Imperx: C4191 Applications


The C4191 incorporates a number of unique features tailored to reduce system complexity, maximize interface bandwidth, and expand the usable operational range.


Aerospace ● Surveillance ● Ball Grid Array ● Printed Circuit Board Inspection ● Motion Analysis ● Machine Vision ● Industrial Inspection • Intelligent Traffic Systems • Aerial Imaging • Open Road Tolling Systems


#### Absolute Quantum Efficiency

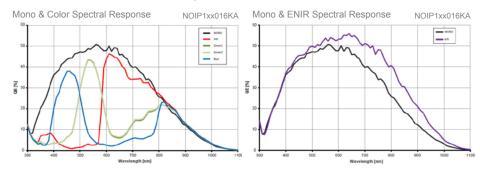

#### **Dimensions**






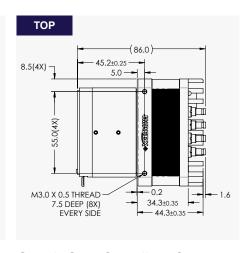

#### Ordering Information





#### Gen<I>Cam Compliant Camera Configurator



### Industrial Cameras & Imaging Systems

IMPERX 6421 Congress Ave., Boca Raton, FL 33487, USA

#### WWW IMPERX COM

Tel: +1-561-989-0006. Email: sales@imperx.com

Rev: cxp\_c4191\_r3\_2019

1 9

10

31127

(4) (5) (6)

(8)

**Hirose Connectors** 

I/O Interface

2



**OUT1 TTL Signal** 

IN1 OPTO +

10. IN1 OPTO -

11. IN2 TTL Gnd

12. OUT2 OPTO +

IN2 TTL Signal

Technical data has been fully checked, but accuracy of printed matter is not guaranteed. Subject to change without notice. Copyright 2019.

Reserved

Reserved

Reserved

Reserved OUT2 OPTO -

OUT1 TTL Gnd

3

4