CHEETAH

C5190CMOS 25 MP

Quad CXP-6



Imperx: C5190

The C5190 features the ON Semiconductor Python NOIP1xx025KA CMOS image sensor with a native resolution of 5120 x 5120 in an APS-H optical format. The GenICam™ compliant camera delivers up to 80 frames per second in global shutter mode using a 4-channel CXP-6 CoaXPress® interface. CMOS technology eliminates smear columns from areas of ultra-bright intensity and specular reflections in uncontrolled lighting applications. The Imperx Cheetah line provides excellent image quality with Imperx proprietary processing. In addition, Imperx puts you in control and gives you full access to raw data without corrections. Using the simple, intuitive GenICam™ compliant user interface, you can quickly apply image corrections, if desired. The CXP-C5190's flexibility, image quality, and speed make it suitable for a broad range of diverse and demanding applications, but "one size doesn't fit all," and Imperx can help optimize the camera to your exact requirements.

Specifications

Feature	Description	
Output Interface	4-channel CXP-6 CoaXPress® w/PoCXP	
Resolution	5120 (H) x 5120 (V)	
Sensor	Python NOIP1xx025KA, CMOS Color/Mono/ ENIR	
Sensor Format	23 mm (H) x 23 mm (V) 32.5 mm diagonal APS-H optical format	
Pixel Size	4.5 microns square	
NIR Sensitivity	Mono: 850nm: 18%, 950nm: 6% ENIR: 850nm: 30%, 950nm: 11%	
Shutter	Global shutter (GS)	
Fixed Pattern Noise	<0.9 LSB	
Sensor Digitization	10-bit	1
Frame Rate	80 fps (8-bit), 70 fps (10-bit)	
Dynamic Range	59 dB	
Row Overhead Time (ROT)	Zero	
Output Bit Depth	8, 10-bit	
Analog Gain Control	1x, 1.26x, 1.87x, 3.17x	
Digital Gain	1x (0dB) to 15.9 (24 dB) with a precision of 0.001x. (AGC available)	
AEC/AGC	Yes	
White Balance	Manual, Auto, Off	
Shutter Speed	1 μs/step, 40 μs to 1.0 sec	
Exposure Control	Off, Internal, External. (AEC available)	
Regions of Interest (ROI)	1 ROI	
Averaging Decimation	1 x 2, 2 x 1, 2 x 2	
Sub-sampling	1 x 2, 2 x 1, 2 x 2	
Trigger Inputs	External, Pulse generator, Software	
Trigger Options	Edge, Debounce	
Trigger Modes	Trigger over CoaXpress, Internal, External, Software	
External Inputs/Outputs	2 IN (OPTO, LVTTL) / 2 OUT (OPTO, TTL)	

Feature	Description
Strobe Output	2 strobes, programmable position and duration
Pulse Generator	Yes, programmable
Data Corrections	2 LUTs pre-programmed with Gamma 0.45; Bad Pixel Correction (static), flat field correction, fixed pattern noise
Lens Mount	F-Mount (Default), M42, EF Canon (passive or active)
Power over CoaXPress (PoCXP)	Yes
Power consumption	Typical: 10 W, Maximum: 10.5 W
Size - Width/Height/Length	72.0 mm (W) x 72.0 mm (H) x 44.3 mm (L)
Weight	379 g
Vibration, Shock	TBD
Environmental	-40 °C to +70 °C Operating, -50 °C to +90 °C Storage
Humidity	10% to 90% non-condensing
MTBF	>323,000 hours @ 40 °C (Telcordia SR-332)
Military Standard	MIL-STD-810G
Regulatory	FCC Part 15 Class A, CE, RoHs




Imperx: C5190 Applications

The C5190 incorporates a number of unique features tailored to reduce system complexity, maximize interface bandwidth, and expand the usable operational range.


Aerospace • Surveillance • Ball Grid Array • Printed Circuit Board Inspection • Motion Analysis • Machine Vision • Industrial Inspection • Intelligent Traffic Systems • Aerial Imaging • Open Road Tolling Systems


NOIP1xx025KA


Absolute Quantum Efficiency

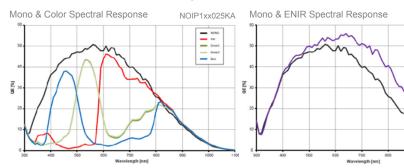

Dimensions








Ordering Information

Hirose Connectors

I/O Interface

2





CoalPress

OUT1 TTL Signal

IN1 OPTO +

10. IN1 OPTO -

11. IN2 TTL Gnd

12. OUT2 OPTO +

IN2 TTL Signal

Gen<I>Cam Compliant Camera Configurator



Industrial Cameras & Imaging Systems

IMPERX 6421 Congress Ave., Boca Raton, FL 33487, USA Tel: +1-561-989-0006. Email: sales@imperx.com

WWW IMPERX COM

Rev: cxp_c5190_r3_2019

1 9

10

31127

(4) (5) (6)

(8)



Reserved

Reserved

Reserved

Reserved OUT2 OPTO -

OUT1 TTL Gnd

3

4

Technical data has been fully checked, but accuracy of printed matter is not guaranteed. Subject to change without notice. Copyright 2019.