

# CHEETAH

## RUGGEDIZED CAMERA SERIES

### C4010 CMOS 9 MP

*GigE Vision® with Power over Ethernet (PoE)*



#### Imperx: C4010

The POE-C4010 camera features the Sony Pregius IMX267 Global Shutter CMOS sensor with a native resolution of 4112 x 2176 in a 1" optical format delivering up to 13.2 frames per second with GigE Vision Power over Ethernet (PoE) output. The Sony Pregius image sensor delivers outstanding sensitivity and excellent image quality. Imperx puts you in control by providing full access to raw data without corrections. Using the simple intuitive graphical user interface, you can quickly apply image corrections, if desired. The C4010's flexibility, image quality, and speed make it suitable for a broad range of diverse and demanding applications, but "one size doesn't fit all," and Imperx can help optimize the camera to your exact requirements.

#### Specifications


| Feature                   | Description  | Feature                    | Description  |
|---------------------------|--|----------------------------|--|
| Output Interface          | GigE Vision® with Power over Ethernet (PoE)  | Strobe Output              | 2 strobes, programmable position and duration  |
| Resolution                | 4112 (H) x 2176 (V)  | Pulse Generator            | Yes, programmable  |
| Sensor                    | Sony Pregius IMX267 CMOS Color/Mono  | Data Correction            | 4 LUTs pre-programmed with Gamma 0.45; Bad pixel correction (static, dynamic), Flat field correction |
| Sensor Format             | 14.2 mm (H) x 7.5 mm (V), 1" optical format, 16.1 mm diagonal                      | Lens Mount                 | C-Mount (default)  |
| Pixel Size                | 3.45 microns square  | P-Iris                     | Optional   |
| Shutter                   | Global shutter (GS)  | P-Iris Control             | Auto, Programmable   |
| Sensor Digitization       | 12-bit   | Supply Voltage Range       | 12 V DC (6 V – 30 V), 1.5 A inrush   |
| Frame Rate                | 13.2 fps (8-bit), 6.6 fps (10-bit/12-bit unpacked), 8.8 fps (10-bit/12-bit packed) | Power Consumption          | 3.8 W (EST)  |
| Dynamic Range             | 71 dB  | Camera Current             | Typical: 280 mA @ 12 V   |
| Output Bit Depth          | 8, 10, 12-bit  | Power Consumption          | Typical: 3.36 W  |
| Analog/Digital Gain       | Manual, Auto; 0 dB – 48 dB, 480 steps  | PoE Capable                | Yes  |
| Digital Gain              | 1x (0 dB) to 4x (12 dB) with a precision of 0.001x                                 | Size - Width/Height/Length | 37 mm (W) x 37 mm (H) x 61.5 mm (L)  |
| Black Level Offset        | Manual (0 – 255), Auto   | Weight                     | 113.2 g  |
| White Balance             | Manual, Auto, Once, Off  | Vibration, Shock           | 20G (20 – 200 Hz XYZ)/100G   |
| Shutter Speed             | 1 µs/step, 14 µs to 16.0 s   | Environmental              | -30 °C to +75 °C Operating (-40 °C to +85 °C tested); -40 °C to +85 °C Storage                       |
| Exposure Control          | Off, Manual, Auto, External  | Humidity                   | 10% to 90% non-condensing  |
| Regions of Interest (ROI) | 2 ROI  | MTBF                       | TBD  |
| Sub-sampling              | 1x2, 2x1, 2x2  | Military Standard          | MIL-STD-810G   |
| Trigger Inputs            | External, Pulse generator, Software  | Regulatory                 | FCC Part 15 Class A, CE, RoHS  |
| Trigger Options           | Edge, Pulse width, Trigger filter, Trigger delay, Debounce                         |                            |  |
| Trigger Modes             | Free run, Standard, Fast   |                            |  |
| External Inputs/Outputs   | 2 IN (OPTO, LVTTTL) / 2 OUT (OPTO, TTL)  |                            |  |

## Imperx: C4010 Applications


The POE-C4010 incorporates a number of unique features tailored to reduce system complexity, maximize interface bandwidth, and expand the usable operational range.

Aerospace • Satellites • Surveillance • Ball Grid Array • Printed Circuit Board Inspection • Motion Analysis • Broadcast Television • Telepresence • Unmanned Aerial Vehicles • Machine Vision • Intelligent Traffic Systems • Aerial Imaging • Open Road Tolling Systems • Situational Awareness

## Absolute Quantum Efficiency

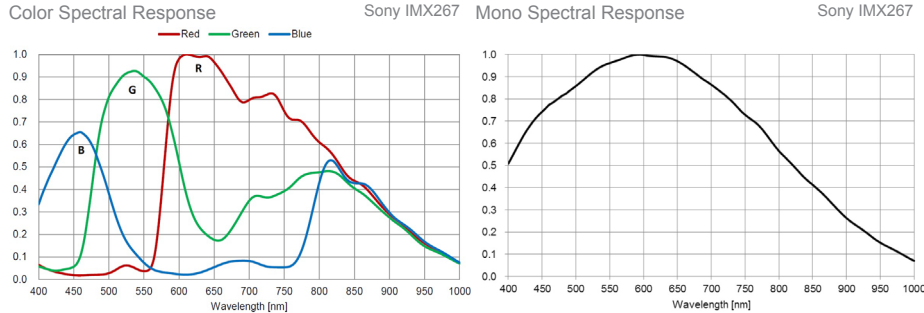


## Dimensions

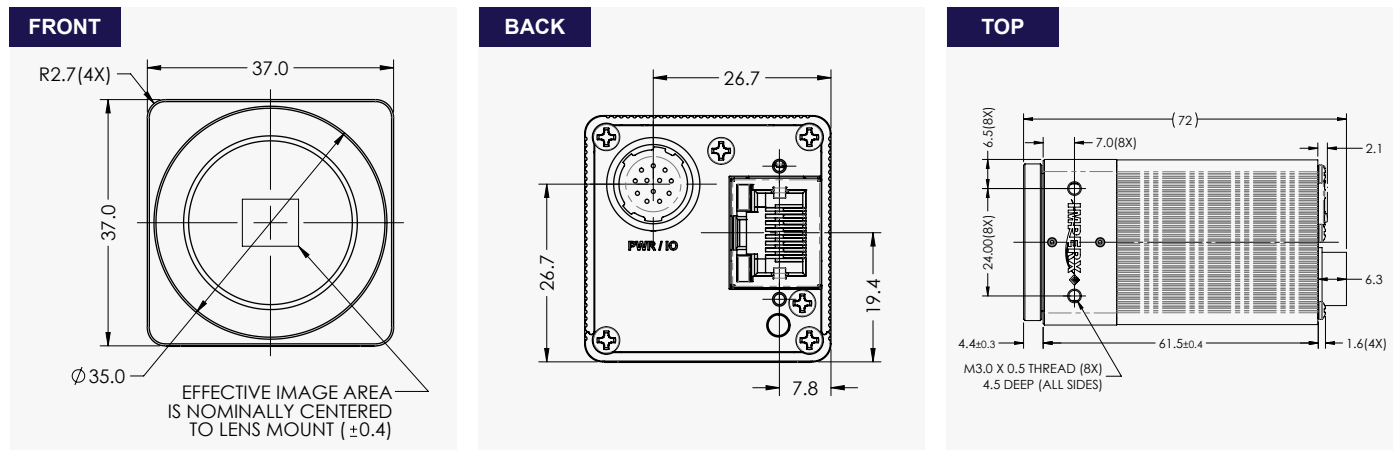

## Ordering Information

| Output Interface                             | Lens Mounts                                   |
|--|---|
| GiGE Vision® with Power over Ethernet (PoE®) | C-Mount (Default)                             |
|  | P-Iris (Optional)                             |
| Sensor Types available                       | Accessories (Sold separately)                 |
| Monochrome                                   | PS12V04A-Power Supply w/ 1 input and 1 output |
| Bayer Color                                  |   |

## Hirose Connectors

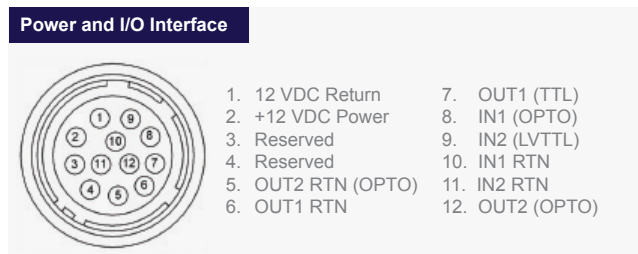


Connector: Hirose HR10A-10R-12PB(71)

Rev: poe\_c4010\_r3\_2019

Quality Management System ISO 9001:2015 Registered  
Environmental Management System ISO 14001:2015 Registered  
DDTC Registered (Directorate of Defense Trade Controls, US Department of State)

## Gen<I>Cam Compliant Camera Configurator

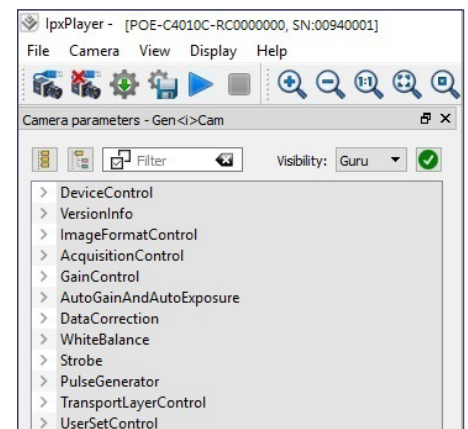

**IMPERX**  
Industrial Cameras & Imaging Systems

IMPERX 6421 Congress Ave., Boca Raton, FL 33487, USA  
Tel: +1-561-989-0006. Email: sales@imperx.com

[WWW.IMPERX.COM](http://WWW.IMPERX.COM)

Technical data has been fully checked, but accuracy of printed matter is not guaranteed. Subject to change without notice. Copyright 2019.